



ALUMINUM CHURCH LIGHTING


by *Wiedemann Industries, Inc.*

P. O. Box 672 Muscatine, Iowa

ALUMINUM CHURCH LIGHTING

futura

NAVE LIGHTS

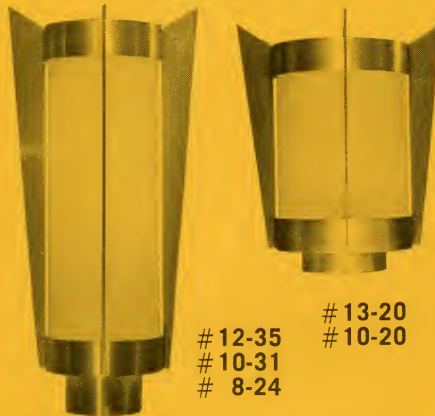


12-35
10-31
8-24

13-20
10-20

COMPANION LIGHTS



10-11



12-7



4-14
5-18
6-20

moderne




12-35
10-31
8-24

12-20
10-20



10-11



12-7



4-14
5-18
6-20

contemporary



12-35
10-31
8-24

13-20
10-20



10-11




12-7




4-14
5-18
6-20

early american

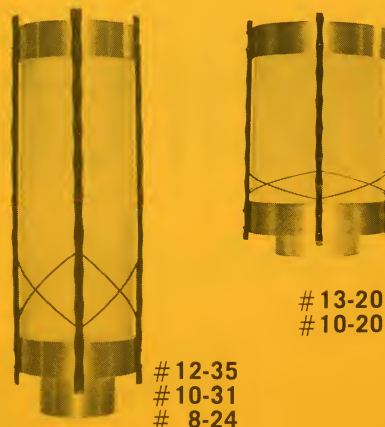

12-35
10-31
8-24

13-20
10-20



10-11





12-7



4-14
5-18
6-20

by Wiedemann Industries, Inc.

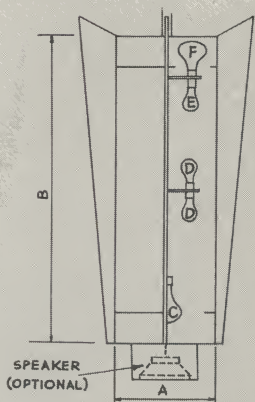



NAVE LIGHT SPECIFICATIONS

Number	A	B	C	D	E	F	SUGGESTED USAGE
#12-35	12" dia.	35"	1-150/300 Watt Refl. Flood Direct Flood Ltg.	8 — 60/100 Watt Type A Center Glow Ltg.	4-60/100 W Type A Center Glow Ltg.	4-75/150 Watt Refl. Flood Indirect Ltg.	Nave - Outside Entrance
#10-31	10" dia.	31"	1-150/300 Watt Refl. Flood Direct Flood Ltg.	8 — 60/100 Watt Type A Center Glow Ltg.	—	4-75W Refl. Flood Indirect Ltg.	Nave - Outside Entrance - Balcony - Foyer
#8-24	8" dia.	24"	1-75/150 Watt Refl. Flood Direct Flood Ltg.	—	4-75T 10/45 Center Glow Ltg.	4-30R20 Refl. Flood Indirect Ltg.	Outside Entrance - Balcony - Foyer

All Bulbs Incandescent 1 to 3 circuits available.

Number	A	B	C	D	E	F	SUGGESTED USAGE
#13-20	13" dia.	20"	1-75/300 Watt Refl. Flood Direct Flood Ltg.	8 — 60/200 Watt Type A Center Glow Ltg.	—	—	Nave - Balcony
#10-20	10" dia.	20"	1-75/150 Watt Refl. Flood Direct Flood Ltg.	8 — 60/100 Watt Type A Center Glow Ltg.	—	—	Nave - Balcony

All Bulbs Incandescent 1 or 2 circuits available.



COMPANION LIGHT SPECIFICATIONS

Number	A	B	C	D	E	F	SUGGESTED USAGE
#10-11	10" dia.	11"	—	4 — 60/100 Watt Type A Center Glow Ltg.	—	—	Narthex - Foyer - Balcony - Hallways - Classrooms

All Bulbs Incandescent

Number	A	B	C	D	E	F	SUGGESTED USAGE
#12-7	12" dia.	7"	—	4 — 60/100 Watt Type A Center Glow Ltg.	—	—	Same as #10-11

All Bulbs Incandescent

Number	A	B	C	D	E	F	SUGGESTED USAGE
#4-14	4" dia.	14"	—	1-75T10/45 Center Glow Ltg.	—	—	Wall mounted
#5-18	5" dia.	17"	—	1-75T10/45 Center Glow Ltg.	—	—	Wall mounted
#6-20	6" dia.	20"	—	2-75T10/45 Center Glow Ltg.	—	—	Wall mounted

All Bulbs Incandescent


**general
specifications**

Wiedemann Church Lighting Fixtures are constructed as follows: Rings, Poles, Brackets and Covers of natural spun aluminum. Fins can be supplied either in natural color or anodized in gold, brass or copper tone color. Glass is opalescent.

Moderne style globes are opalescent acrylic except for style #12-7. Early American ornamentalations are wrought aluminum in black. Globes are easily removable for cleaning. Specifications are subject to change without notice.


Speakers are available for all nave or balcony lights as a replacement for light "C."

ALUMINUM CHURCH LIGHTING by *Wiedemann Industries, Inc.*

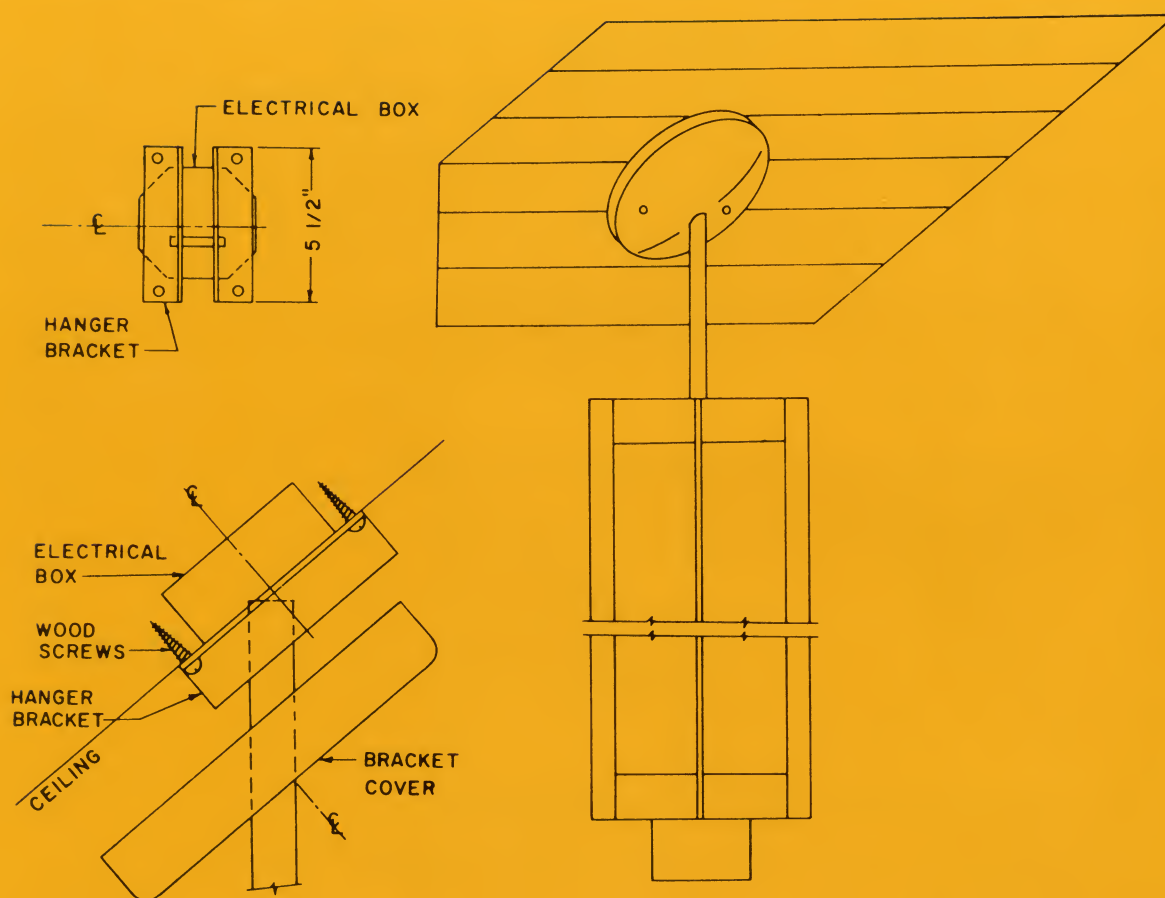

NAVE LIGHTING PLAN


Suggestions to Aid in the Selection of Proper Nave Lighting

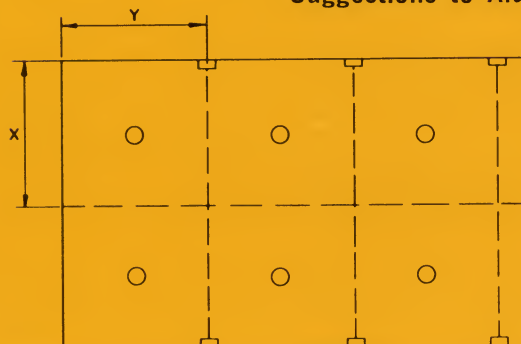

If bottom of light is 10'-0" to 11'-6" from the floor

	X	Y	Type of Light
Up to	14'	14'	#8-24
Up to	16'	16'	#10-20
Up to	20'	18'	#10-31
Up to	30'	18'	#12-35, #13-20, #12-20

Wiedemann Industries is the originator of the fiberglass baptistry and is the leading baptistry specialist. Look for the Wiedemann catalog in Sweet's Architectural File, 35c/WI

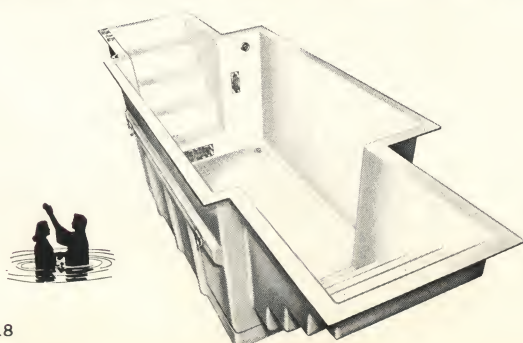

CHURCH SPIRES are new products of Wiedemann Industries and are fabricated from fiberglass.

For complete information, write or call:

Wiedemann Industries, Inc.
P.O. Box 672, Muscatine, Iowa, 319-263-6642